

Receiver
From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

60153572.

Model :

NOVA UP 300 M-AE

Pump data

Free passage : 10 mm
Pressure rating :
Min. fluid temperature : 273 K
Max. fluid temperature : 308 K
Max. Ambient temperature : 313 K

Requested data



Flow : 0 l/s
Head : 0 m
Fluid : Water, pure
Fluid Temperature : 293 K
Density : 998.3 kg/m³
Kinematic viscosity : 1.005 mm²/s
Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :
Head :

Materials

Pump body Technopolymer
Impeller Technopolymer
OR ring NBR
Motor top body Stainless Steel AISI 304
Rotor shaft AISI 416 X12 CrS 13 UNI EN 10088-1
V-RING NBR
Suction strainer Technopolymer

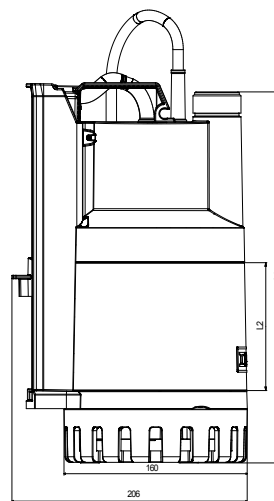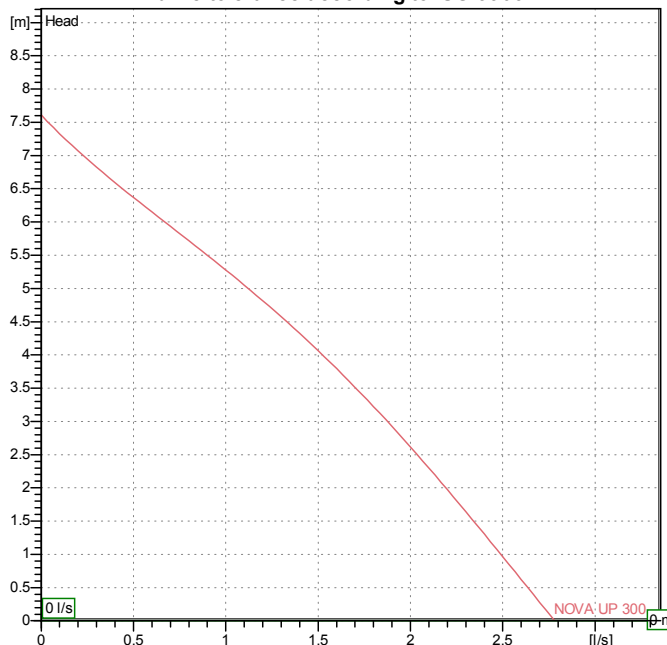Curve tolerance according to ISO 9906

Motor data
Weight : 5.8 kg

Motor brand : DAB
Nominal power P2 : 0.21 kW
Rated speed : 2850 1/min
Rated voltage : 1~ 220-240 V
Nominal current : 1.5 A
Degree of protection : IP 68

50 Hz

Dimensions in mm

L1	296.2				
L2	75.9				


Pump connection

Suction side : /
Discharge side : 1 " 1/4 G / --

	Receiver	From
Society Reference Address Phone Fax E-mail		

NOVA UP 300 M-AE

Curve tolerance according to ISO 9906

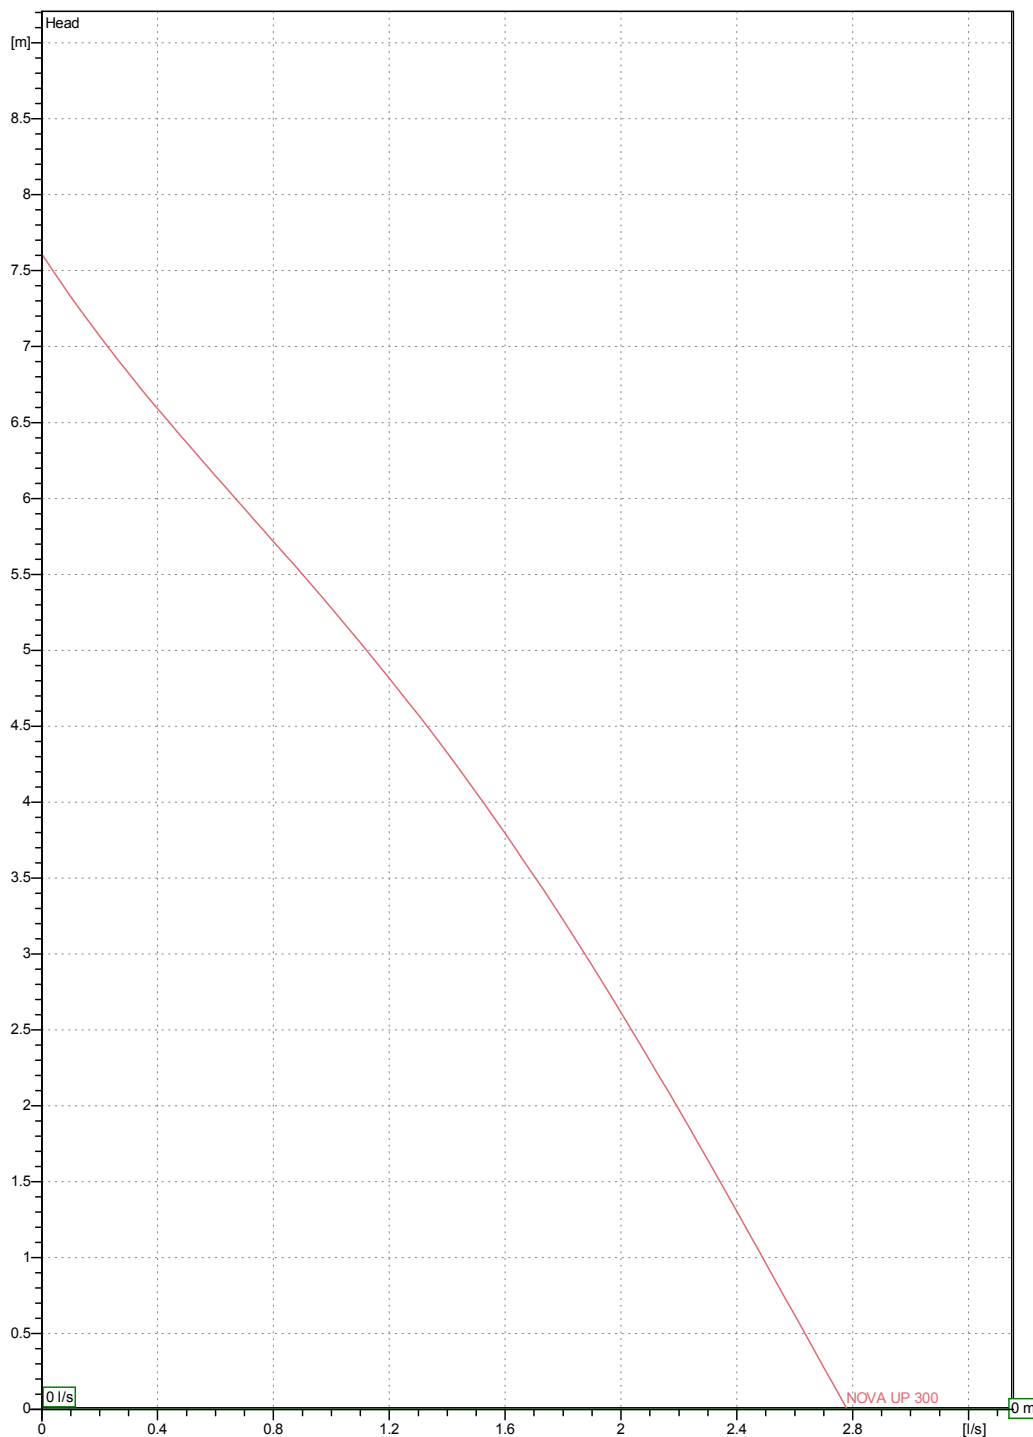

Hydraulic data (duty point)


Suction side :	Discharge side : 1 " 1/4 G --	Flow : 0 l/s	Head : 0 m	Rated speed : 2850 1/min
Project	Project ID	Created by	Created on 27/10/2017	

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NOVA UP 300 M-AE

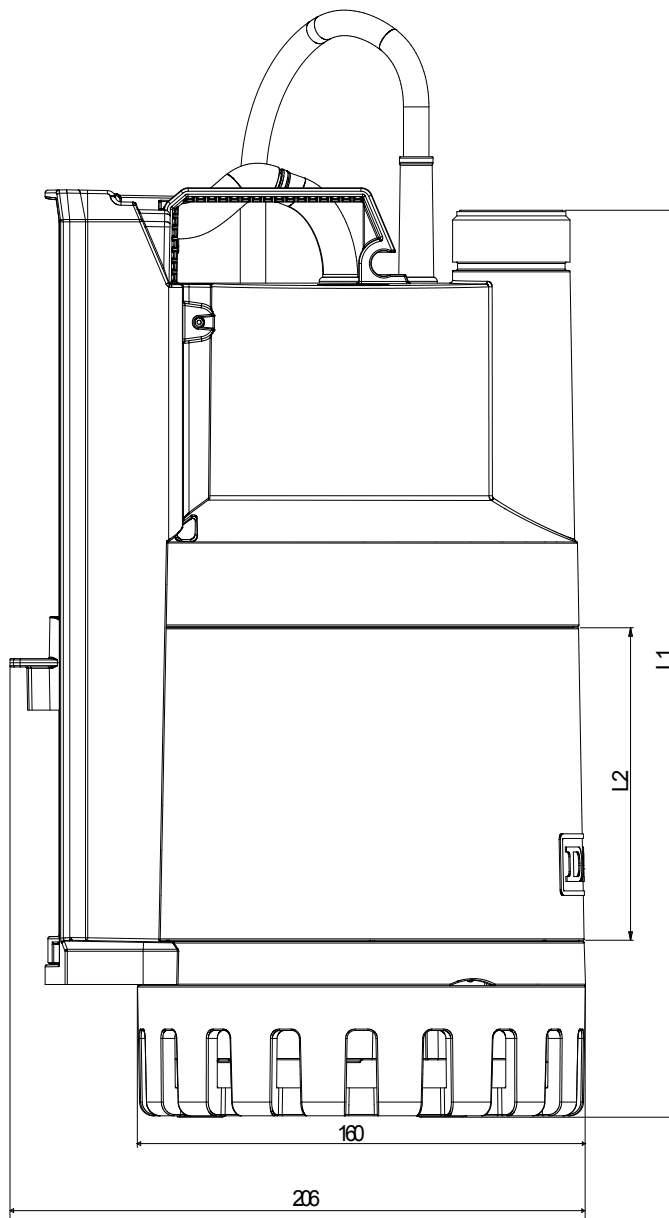

Dimensions in mm

Pump connection

1	L1	296.2
2	L2	75.9

Suction

Discharge
1 " 1/4 G
-

Project

Project ID

Created by

Created on

27/10/2017